


**Introducing hydraulics
that have both
THE LEAST AND THE MOST
going on inside...**

E-58H THE NEXT GENERATION OF HIGH PERFORMANCE HYDRAULICS



Redesigned top cap prevents moisture from contaminating the hydraulic unit.

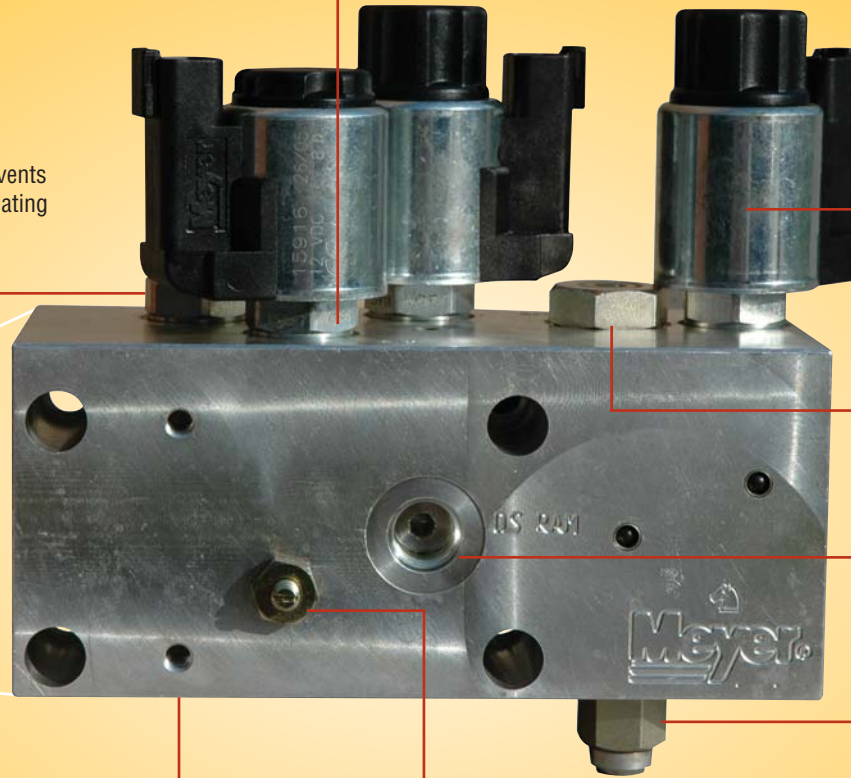

∴ A

The redesigned valve cartridges optimize the oil flow for more responsive snowplow operation.



∴ B

The two-wire (power & ground) Deutsch-style connectors between the coils and the solenoid valves provide a weatherproof and reliable connection.



∴ C

The redesigned sump casting has the A-valve built into the block to increase base reliability and performance.



∴ D

Dual-pilot check valve provides better performance by holding the plow in place to control spike pressure.




∴ E

All coupler parts use SAE-6 threads with o-ring seals to eliminate leaks and minimize maintenance.

∴ I

The stand alone B-check valve assembly has been repositioned for easy servicing.

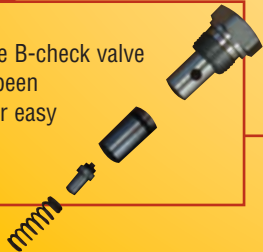

∴ H

Replaceable fluid filter cleans the fluid returning from both angle and lifting cylinders for improved maintenance and performance.



∴ G

Easily accessible drop speed adjustment provides better control and easier maintenance.

∴ F

The cartridge-style, cross-over relief valve is one-piece, non-adjustable and pre-set to eliminate the need for field adjustments to provide more reliable performance.

